



250 W 6 GHz



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 Ω ± 5%
Frequency	DC – 6 GHz
Max VSWR	≤ 1.20 at 6 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	250 W
Weight	3 kg

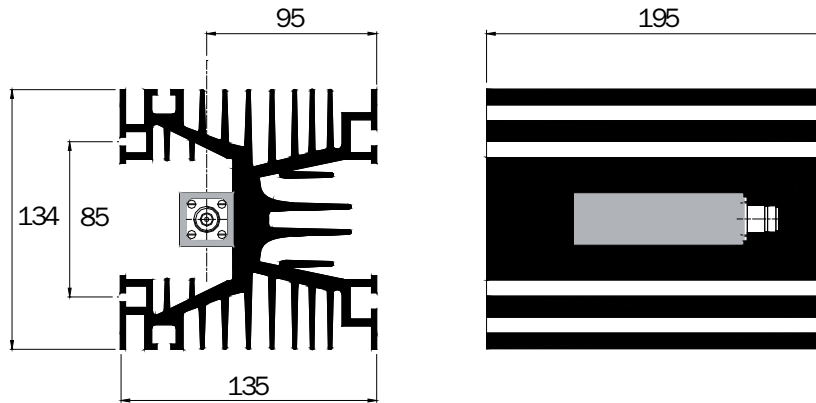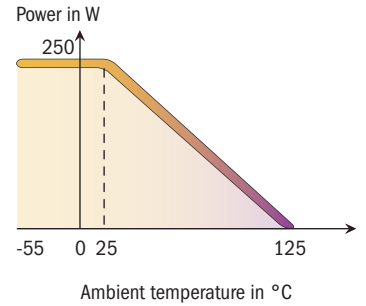

Dimensions in mm

P/N	Connector
17-0443	N f
17-0444	N m