





Standards
NF C 96-315
MIL-DTL-39030

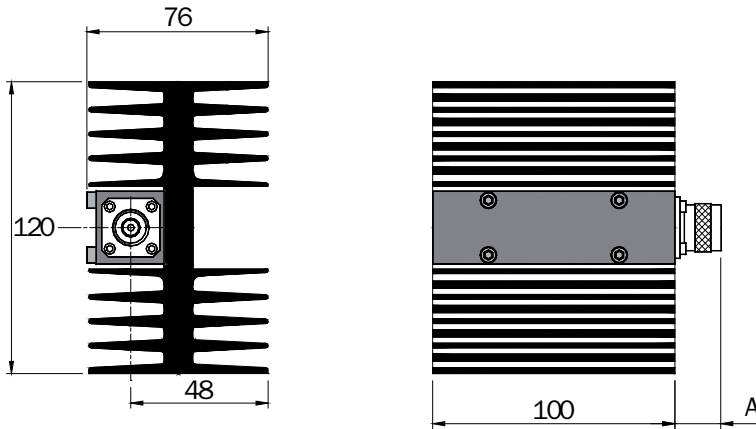

Impedance	50 Ω ± 5%
Frequency	DC - 6 GHz
Max VSWR	≤ 1.20 at 6 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	100 W
Weight	1.1 kg

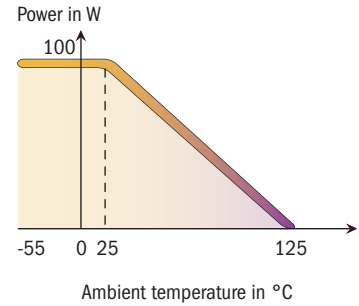

Dimensions in mm

P/N	Connector	A
17-0449	N f	19
17-0450	N m	21

